# INSTALLATION INSTRUCTION FOR FIXTURE #1773-301

**WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.**

**ASSEMBLY THE FIXTURE(FIG.2)**

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Adjust the arms to its desired position.
3. Thread the finial(G) over the nipple(F) till snug;
4. Slide the candle cover(C) over the socket(D) well;
5. Install the light bulb in accordance with fixture's specifications. DO NOT EXCEED THE MAXMUM WATTAGE RATING!
6. Clip the shade(B) over the bulb properly.
7. Hook the crystal(E) onto the fixture body per the drawing shown.

**MOUNTING THE FIXTURE(FIG.1)**

1, Shut off the power supply at the fuse box or circuit breaker box.
Remove the old fixture from ceiling. Including the cross bar.

2, Thread the nipple(I) into the collar loop(J) until snug.

3, Thread the other end of nipple(I) into the cross bar(F) until snug.

4, Place lock washer(E) over the end of nipple(I) protruding through cross bar(F) and thread hex nut(D) onto nipple until tight.

5, Take this crossbar assembly and mount to ceiling outlet box(A)
using outlet box screw(H) tightly. The side of cross bar marked with "GND" must face out.

6,By measuring, determine correct number of links needed for proper hanging height. Using pliers, disconnect and discard remaining chain.

7, Connect the safety chain link(M) onto the both end links of the chain.

8, Connect one safety chain link(M) onto the fixture loop(A). Close the safety chain link(M) tightly.

9, Lace the fixture wires through the chain.

10, Slip collar ring(L) over the chain, then do the same with canopy(K).

11, Connect the other safety chain link(M) onto the collar loop(F). Close the link.

12, Feed the fixture wires through the collar loop(J) and nipple(I) and pull until taut.

**CONNECTING THE WIRE (See fig.3)**

1. Take the black wire from the ceiling outlet box and the smooth Wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed
wire leg of fixture wire. NOTE :Twist wire together in the same direction, then twist the wire connector onto wire.
3. If your outlet box has a grounding wire (Green or bare Copper).Attach this wire and the bare copper wire from the Fixture together as step 1. If outlet box has no ground wire. Attach the bare copper fixture wire to the green ground screw on the cross bar.
4. Tuck these wires connectors neatly into the ceiling out let box
and raise the collar ring (L) and thread onto collar loop(J) protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.2**

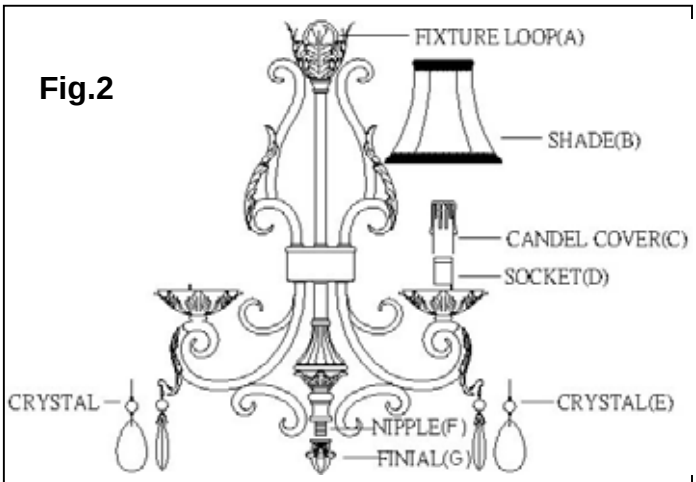


**Fig.1**

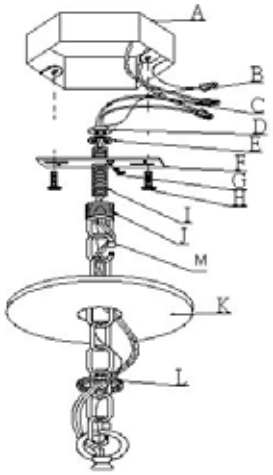


**Fig.3**

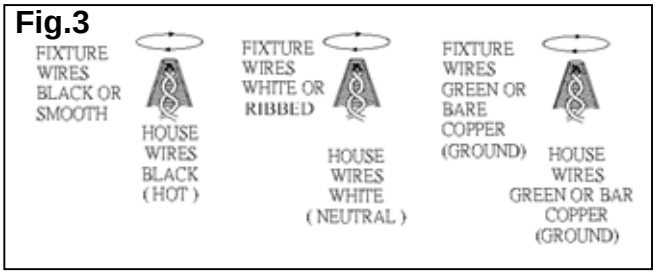
FIXTURE WIRES BLACK OR SMOOTH
HOUSE WIRES BLACK (HOT)
FIXTURE WIRES WHITE OR RIBBED
HOUSE WIRES WHITE (NEUTRAL)
FIXTURE WIRES GREEN OR BARE COPPER (GROUND)
HOUSE WIRES GREEN OR BAR COPPER (GROUND)

UL® Listed

american lighting association